


Power Panel Assembly Notes (Single)



Refer to the above diagram when reading the following assembly notes (click on it for a hires image). Also refer to [Power Panel PCB](#) (3D Model)

1. Fit R1 (2K2 for a standard Red LED)
2. Cut and strip 5-7mm off one end of the black and yellow leads
3. Insert the leads in to their solder points and solder (Yellow = +15V, Black = 0V)
4. Trim off excess wire
5. Feed the other ends of the leads through their respective strain-relief points and pull the leads through until there is no excess lead
6. Mount the LED on to the front panel but leave the nut loose so that the LED body can be turned for final alignment
7. Mount the 2x DC jacks on to the pcb but do not solder
8. Mount the switch (note the orientation) on to the pcb but do not solder
9. Offer the pcb up to the panel components ensuring that the LED is correctly orientated to the pcb markings
10. Attach nuts to the DC jacks and switch and secure using a suitably sized spanner.
11. Check the alignment of the pcb. The pcb should be firmly against the switch and should be parallel to the front panel
12. Solder all the components in to place
13. If desired, shorten the 2 leads to a practical length then strip and cut 5-7mm off the ends of the leads and fit 1/4" quick-connect tabs
14. Solder the green/yellow wire to the solder tag
15. Fit the uninsulated 4mm socket as per the drawing.
16. Solder the unsoldered end of the green/yellow wire to the 0V terminals on the nearest DC jack

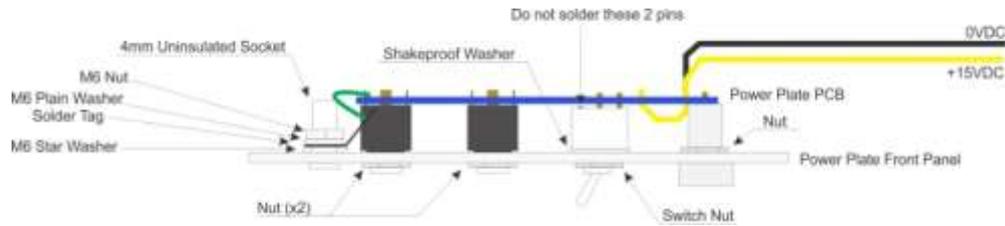

Click [here for the Bill Of Materials](#)

This uses a single external DC power source of +15VDC¹ and is intended to feed an internally mounted DC/DC power supply that generates the requisite +12V/-12V rails for the system.

It is connected to one of the DC inlets. The 2nd DC inlet is to allow the DC supply to be daisy-chained to a 2nd Power Panel allowing multiple systems to be powered from a single external supply.

The maximum rating is approximately 5A (defined by the DC sockets) so this must be considered when connecting multiple power boards (this 5A figure is the total for both the +12V and -12V rails and should include a small allowance for peak loads).



NB: You must NOT connect multiple external power supplies to these DC sockets



ELBY Designs - Laurie Biddulph

9 Follan Close, Kariong, NSW 2250, Australia

elby-designs@bigpond.com

<http://www.elby-designs.com>